

Mathematical Mechanical Biology

Module 2: Bio-Membranes

Lecture Notes for C5.9

Alain Goriely, Oxford, MT 2026

With contributions from Eamonn Gaffney and Derek Moulton

Contents

1	Background: basic geometry of surfaces	2
1.1	Length and area	2
1.2	Curvatures	4
1.3	The Gauss-Bonnet theorem	7
1.4	Examples	8
2	Fluid biomembranes	10
2.1	The biomembrane model	10
2.2	The shape equation in the Monge representation	12
2.2.1	Area minimisation	13
2.2.2	Small gradient approximation	14
2.3	Examples	17
2.3.1	One-dimensional fluid membranes	17
2.3.2	Flicker spectroscopy	17
3	Axisymmetric Membranes and Shells	20
3.1	Elastic membranes with linear constitutive laws	20
3.1.1	Kinematics	20
3.1.2	Mechanics	22
3.1.3	Constitutive laws	24
3.1.3.1	Variable moduli.	25
3.1.4	Inflation of a spherical membrane	25

HEALTH WARNING:

The following lecture notes are meant as a rough guide to the lectures. They are not meant to replace the lectures. You should expect that some material in these notes will not be covered in class and that extra material will be covered during the lectures (especially longer proofs, examples, and applications). Nevertheless, I will try to follow the notation and the overall structure of the notes as much as possible.

1 Background: basic geometry of surfaces

■ Geometry

Here, we introduce basic notions of differential geometry for surfaces. Of particular importance are the definition of the area and length elements and the notions of mean and Gaussian curvature. The Gauss-Bonnet theorem (given without proof) will also be important in our discussion of mechanics.

For simplicity we consider here an orientable parametrised surface Σ defined by the position vectors

$$\mathbf{x} = \mathbf{x}(\xi^1, \xi^2) \in \mathbb{R}^3, \quad (\xi^1, \xi^2) \in M \subset \mathbb{R}^2. \quad (1)$$

We assume that $\mathbf{x}$ is at least of class C^2 and such that the tangent vectors

$$\mathbf{r}_i = \frac{\partial \mathbf{x}}{\partial \xi^i}, \quad i = 1, 2 \quad (2)$$

are linearly independent for all $(\xi^1, \xi^2) \in M$. Since Σ is orientable, we can define a normal vector (see Fig. 1)

$$\mathbf{n} = \frac{\mathbf{r}_1 \times \mathbf{r}_2}{\|\mathbf{r}_1 \times \mathbf{r}_2\|}, \quad (3)$$

where $\|\mathbf{a}\| = \sqrt{\mathbf{a} \cdot \mathbf{a}}$. Note that by definition $\{\mathbf{r}_1, \mathbf{r}_2, \mathbf{n}\}$ forms a basis (but not necessarily orthonormal – it turns out that it is not always advantageous to use an orthonormal basis to describe surfaces).

1.1 Length and area

To identify key quantities, we first compute the area of a surface

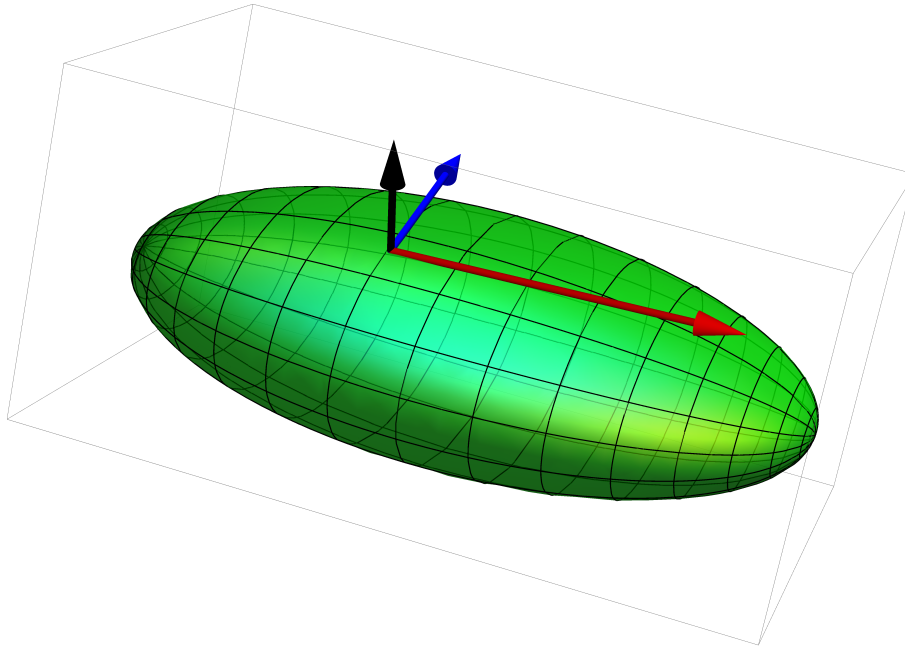


Figure 1: Tangent vectors (red and blue) on an ellipsoid parameterised by two angles (thin black line). The normal vector (in black) is simply obtained as the cross product of the two tangent vectors.

■ Area element

We start with

$$A = \int_{\Sigma} dS \quad (4)$$

That is,

$$A = \iint_M \sqrt{g_{11}g_{22} - g_{12}^2} \, d\xi^1 d\xi^2 \quad (5)$$

where $g_{ij} = \mathbf{r}_i \cdot \mathbf{r}_j$

Alternatively, we can write

$$A = \iint_M \sqrt{\det(G)} \, d\xi^1 d\xi^2 \quad (6)$$

which naturally leads to the definition of $G = (g_{ij})$, the matrix of the *metric tensor*.

Next, we compute a length element

■ Length element

We start with a curve $\mathbf{r} = \mathbf{r}(t)$ defining a path γ on Σ

$$L = \int_{\gamma} ds \quad (7)$$

That is,

$$ds^2 = g_{ij} d\xi^i d\xi^j \quad (8)$$

and

$$L = \int_I \sqrt{g_{ij} \dot{\xi}^i \dot{\xi}^j} \, dt \quad (9)$$

Associated with the metric we have defined the *first fundamental form* $ds^2 = g_{ij} d\xi^i d\xi^j$.

1.2 Curvatures

We are interested in defining curvatures on the surface Σ . We consider a curve C on Σ passing through a point P and parameterised by its arc length s and define $\mathbf{t}$ as the tangent vector of C at P .

We know from Module 1 that the curvature of the curve C at a point P is obtained as $|\mathbf{t}'|$. It is therefore natural to define the curvature vector

$$\mathbf{k} = \frac{d\mathbf{t}}{ds} \quad (10)$$

and decompose it into two components, the *normal curvature vector* $\mathbf{k}_n$ and the *geodesic curvature vector* $\mathbf{k}_g$

$$\mathbf{k} = \mathbf{k}_n + \mathbf{k}_g \quad (11)$$

where $\mathbf{k}_n = -k_n \mathbf{n}$ is along the normal vector¹, that is

$$k_n = -\mathbf{n} \cdot \frac{d\mathbf{t}}{ds}, \quad k_g = \|\mathbf{k}_g\| = \left| \mathbf{t} \cdot \left(\frac{d\mathbf{t}}{ds} \times \mathbf{n} \right) \right|. \quad (12)$$

¹Note the choice of sign designed to ensure that the normal curvature of a sphere of radius R is indeed $k_n = +1/R$ rather than $-1/R$ if we take $\mathbf{n}$ to be outer normal vector.

The *normal curvature* k_n is a property of the surface itself and gives the curvature in a planar slice spanned by the normal and tangent vector (see Fig. 1.2) whereas the *geodesic curvature* gives the curvature on the curve on the surface (it is identically zero for a geodesic curve).

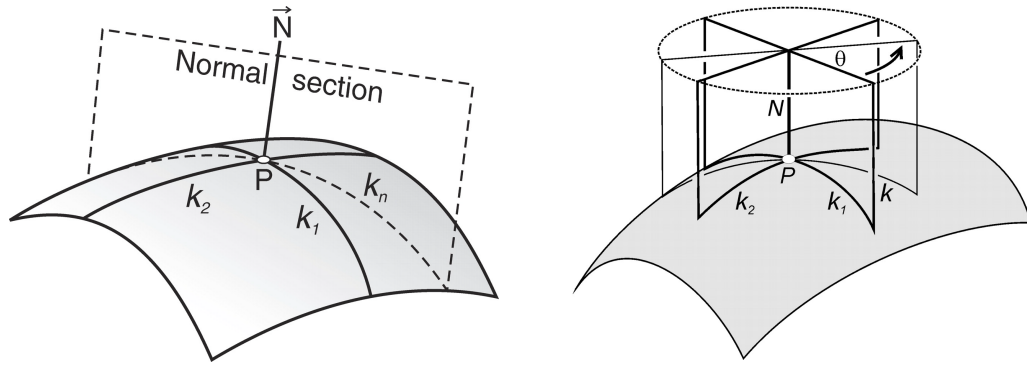


Figure 2: The normal curvature of a curve on a surface in a given direction $\mathbf{t}$ is given by the curvature of the curve obtained as the intersection of the surface with the plane spanned by $\mathbf{n}$ and $\mathbf{t}$.

We can compute explicitly the normal curvature for a given curve.

■ The normal curvature

That is,

$$k_n = K_{ij}(\xi^i)'(\xi^j)' \quad (13)$$

where

$$K_{ij} = K_{ji} = -\mathbf{n} \cdot \frac{\partial \mathbf{r}_j}{\partial \xi^i} \quad (14)$$

which naturally leads to the definition of $K = (K_{ij})$, the matrix of the *extrinsic curvature tensor*. This tensor is naturally associated with the *second fundamental form* $K_{ij}d\xi^i d\xi^j$.

A natural question is to determine the extremal values of the normal curvature as we vary the tangent vector at P .

■ Principal curvatures

That is, the *principal curvatures* are the eigenvalues of the *principal curvature matrix*

$$L = G^{-1}K. \quad (15)$$

Define $\mathbf{e}_1$ and $\mathbf{e}_2$ as the orthonormal eigenvectors associated with the principal curvatures k_1 and k_2 . We can write

$$\mathbf{t} = \cos \theta \mathbf{e}_1 + \sin \theta \mathbf{e}_2 \quad (16)$$

and, in general, we have (Euler's theorem 1760, see Fig. 1.2)

$$k_n = k_1 \cos^2 \theta + k_2 \sin^2 \theta. \quad (17)$$

The principal curvatures can be used to define the mean curvature H and Gaussian curvature K_G as follows

$$2H = \text{tr}(L) = k_1 + k_2, \quad (18)$$

$$K_G = \det(L) = k_1 k_2. \quad (19)$$

It can be shown that the Gaussian curvature is intrinsic to the surface (in the sense that it only depends on the metric and not on the normal vector). This result is contained in the Gauss' famous Theorema Egregium (remarkable theorem). Note that K_G is independent of the parameterisation but that H can change sign (depending on the choice of the normal vector).

A *minimal surface* is such that $H = 0$ identically for all points. These surfaces play a particularly important role in a number of important problems and we will indeed see that the vanishing of the mean curvature naturally arises as a condition to minimise the area.

The Gaussian curvature is particularly important in the classification of surfaces as either *elliptic* ($K_G > 0$), *hyperbolic* ($K_G < 0$), or *parabolic* ($K_G = 0$).

1.3 The Gauss-Bonnet theorem

An important result of global topology is the Gauss-Bonnet theorem (Bonnet 1848). Let Σ be a compact two-dimensional Riemannian manifold with boundary $\partial\Sigma$. Let K_G be the Gaussian

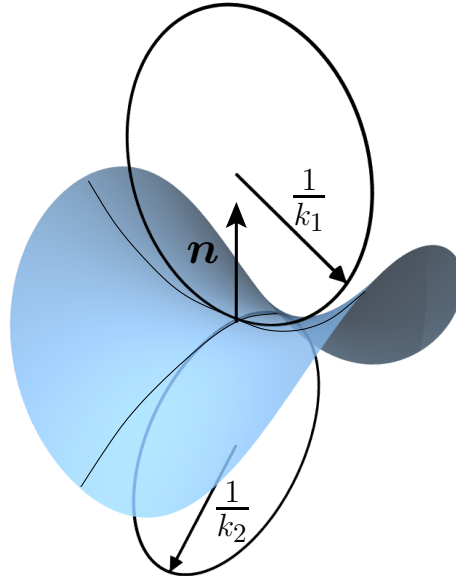


Figure 3: The principal curvatures of a surface are the extremal values of the normal curvature at a point and correspond geometrically to the curvatures of the two principal normal sections.

curvature of Σ , and k_g the geodesic curvature of $\partial\Sigma$. Then

$$\int_{\Sigma} K_G dS + \int_{\partial\Sigma} k_g ds = 2\pi\chi(\Sigma), \quad (20)$$

where $\chi(\Sigma)$ is the Euler characteristic of Σ , a global topological property, which, for a closed orientable surface of genus² p is given by $\chi(\Sigma) = 2 - 2p$.

Of particular interest for us is the case of a closed orientable surface for which

$$\int_{\Sigma} K_G dS = 4\pi(1 - p). \quad (21)$$

1.4 Examples

Examples of different minimal surfaces are given in Fig. 4. A Mathematica file that can create these graphs can be downloaded with the Lecture Notes material (“Curvature Computation.nb”).

²In three dimensions, the genus of an orientable surface is given by the number of handles, a sphere has genus 0, a torus or a mug has genus 1, and so on.

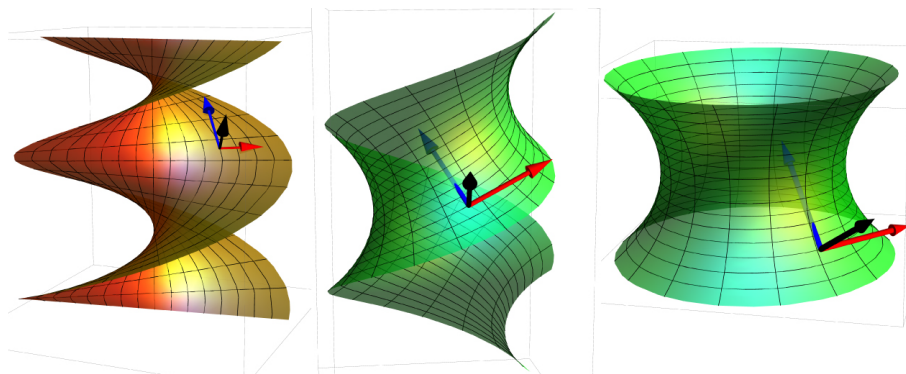


Figure 4: Different minimal surfaces. Left: the helicoid. Middle: The helico-catenoid. Right: the catenoid. Tangent vectors (red and blue). The normal vector (in black) is simply obtained as the cross product of the two tangent vectors.

2 Fluid biomembranes

■ Motivation

Many biological membranes are made of lipid bilayers. Mechanically, these structures and synthetic lipid vesicles resist bending, stretching but are fluid in the plane and as such do not resist shear. In this Chapter we consider the model of Canham (1970)-Helfrich (1973)-Evans (1973) to describe the response of such membranes under pressure.

2.1 The biomembrane model

We have the following assumptions:

- A1.** The biomembrane is thin enough with respect to its maximal radius of curvature and typical length so that it can be represented by a surface Σ .
- A2.** The biomembrane is shearless (offers no resistance to in-plane shear) but resists bending and stretching.
- A3.** The energy associated with change in bending is given by the lowest polynomial in the surface mean and Gaussian curvatures that preserve the parameterisation and the energy of stretching by the change of area.

A pedantic but important remark: A membrane is a membrane but is not a membrane, in the sense that the term membrane used in biology is the same term used by biophysicists but not the same as the term “membrane” used in mechanics. In mechanics a *membrane* is a two-dimensional structure that can resist tension but not compression or bending. A *plate* is an initially flat structure that resists bending, tension, and compression (it can be unshearable or shearable depending on the theory). A *shell* is an initially curved surface that resists bending, tension, and compression (it can be unshearable or shearable depending on the theory). We will use the term *biomembrane* or *fluid membrane* to describe a shearless structure that can resist bending and stretching.

Following the assumptions, we posit that the elastic energy of a biomembrane with surface Σ is given by

$$\mathcal{E} = \int_{\Sigma} dS [\gamma + 2\kappa(H - H_0)^2 + \bar{\kappa}K_G] \quad (22)$$

where

- H and K_G are the mean and Gaussian curvatures defined in the previous section,
- γ is the surface tension (as usually found in a theory of surfactant),
- κ is the bending modulus (confusing but standard notation),
- $\bar{\kappa}$ is the saddle-splay modulus,
- H_0 is the intrinsic mean curvature of the biomembrane.

In general, one can find the shape of the surface by minimising the energy $\mathcal{E}$ with respect to all continuous deformations of a given reference shape. Typically, the system is subject to other constraints such as constant volume or constant pressure. In such cases, we can introduce the corresponding Lagrange multiplier and minimise an amended function. For instance, for constant volume $V = V_0$, the shape will be obtained by minimising

$$\mathcal{E}_P = \mathcal{E} - P(V - V_0) \quad (23)$$

subject to the condition $V = V_0$. Here P is the Lagrange multiplier (which, of course can be identified as the pressure). Similarly for the case of constant pressure, we will need to minimise

$$\mathcal{E}_V = \mathcal{E} - PV. \quad (24)$$

Note that the set of extrema of $\mathcal{E}_P$ and $\mathcal{E}_V$ are the same but their stability will be in general different.

Remember that from the Gauss-Bonnet theorem for a closed surface, we have

$$\int_{\Sigma} K_G dS = 4\pi(1 - p). \quad (25)$$

Therefore, for a closed surface the energy contribution of the Gaussian curvature during deformation is constant (as long as the topology of the surface does not change) and can be ignored when determining the shape of the membrane.

Dimensionally, κ is an energy and γ is an energy per length squared. Therefore, we can define a typical length scale of tension versus bending given by

$$\lambda_{tb} = \sqrt{\frac{\kappa}{\gamma}}. \quad (26)$$

■ Estimates

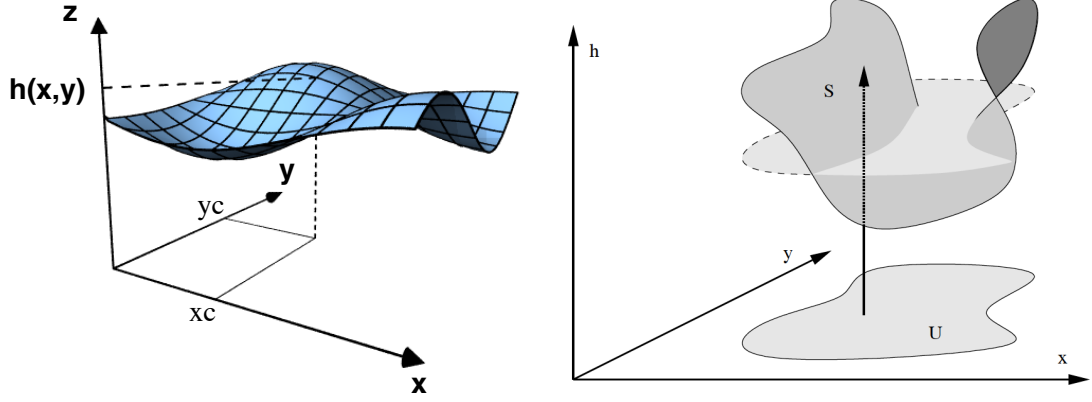


Figure 5: The height function (or Monge parameterisation) of a surface. Note that this representation is not valid if the surface curves back on itself (for instance in the case on the right).

2.2 The shape equation in the Monge representation

In order to find the shape of the surface we need to minimise the corresponding energy. This is in general a difficult task as the variations of the curvatures with respect to the deformation need to be found in general. To illustrate this process, we consider here a simpler, but important, case where the surface Σ can be represented by a height function $h = h(x, y)$ of class C^2 . That is,

$$h : U \subset \mathbb{R}^2 \rightarrow \mathbb{R}, \quad |\nabla h| < \infty, \quad (27)$$

where $\nabla = \mathbf{e}_x \partial_x + \mathbf{e}_y \partial_y$. The position vector for points on the surface is simply

$$\mathbf{r} = (x, y, h(x, y)) \quad (28)$$

■ Normal and metric

We first compute the normal and metric

This, we have for example, $\mathbf{n} = g^{-1/2} (-\nabla h + \mathbf{e}_z)$, $g = \det(G) = 1 + (\nabla h)^2$.

We can now compute the mean and Gaussian curvatures

■ Curvatures in Monge representation

Hence, we have

$$2H = -g^{-3/2} [h_{xx}(1 + h_y^2) + h_{yy}(1 + h_x^2) - 2h_{xy}h_xh_y], \quad (29)$$

and

$$K_G = g^{-2} (h_{xx}h_{yy} - h_{xy}^2). \quad (30)$$

The mean curvature can also be written in a coordinate free form as

$$2H = \nabla \cdot (g^{-1/2} \nabla h) = -\nabla \cdot \mathbf{n} \quad (31)$$

2.2.1 Area minimisation

Note that if $\kappa = \bar{\kappa} = H_0 = 0$ and γ is constant, the energy for the biomembrane simplifies to the well-known energy given in the theory of surface tension (in the absence of gravity)

$$\mathcal{E}_S = \gamma \int_{\Sigma} dS. \quad (32)$$

We can now use Monge representation to obtain the condition for area minimisation

■ Condition for area minimisation

And we find the two equivalent local conditions for the existence of a minimal surface

$$\nabla \cdot \mathbf{n} = 0 \iff H = 0. \quad (33)$$

Note that this condition remains valid even in the general case (where a surface cannot be represented by a height function) but only provides necessary conditions.

2.2.2 Small gradient approximation

We further restrict our analysis to the case of $\bar{\kappa} = H_0 = 0$ and for small gradients $|(\nabla h)| \ll 1$.

■ Energy

That is, the energy now reads

$$\mathcal{E}_2 = \frac{1}{2} \iint dx dy \left[\kappa (\Delta h)^2 + \gamma (\nabla h)^2 \right]. \quad (34)$$

This form of the energy is now sufficiently simple to allow us to compute the first variation with respect to h (that is $h \rightarrow h + \delta h$). To keep track of terms on the domain boundary we need to do the variation from first principles, analogously to the derivation of the Euler-Lagrange equations

■ First variation of the energy

That is, we have

$$\begin{aligned} \delta \mathcal{E}_2 = & \iint dx dy \Delta [\kappa(\Delta h) - \gamma h] \delta h \\ & + \oint ds \mathbf{N} \cdot [\kappa(\Delta h) \nabla \delta h + (\gamma \nabla h - \kappa \nabla \Delta h) \delta h]. \end{aligned} \quad (35)$$

where $\mathbf{N}$ is the outer normal to the projected surface contour on the $x - y$ plane.

A necessary condition for minimisation is $\delta\mathcal{E}_2 = 0$. The vanishing of the area integral provides the *shape equation*

$$\Delta (\Delta - \lambda^{-2}) h = 0 \quad (36)$$

where $\lambda = \lambda_{\text{tb}}$ is the typical length scale introduced in (26).

The vanishing of the line integral leads to boundary conditions for our fourth-order problem. We have two sets of conditions to satisfy.

- 1) For the first term in the bracket, we fix either the normal component of the contour so that

$$\mathbf{N} \cdot \nabla h = \text{Cst} \Rightarrow \mathbf{N} \cdot \nabla \delta h = 0 \quad (37)$$

or, we impose $\Delta h = 0$ on $\partial\Sigma$.

- 2) Similarly, we need to either fix h at the boundary so that $\delta h = 0$ at the boundary, or we impose

$$\mathbf{N} \cdot \nabla h = \lambda^2 \mathbf{N} \cdot \nabla \Delta h, \quad (38)$$

for h on the boundary.

Together, this leads to four different possible sets of boundary conditions (or any combinations in different parts of the domain).

2.3 Examples

2.3.1 One-dimensional fluid membranes

As a first particular case of the shape equation (36), we consider the case where $h = h(x)$ only, that is we assume that the sheet is uniform along the y -axis. In this case, we have

$$\partial_{4x} h - \lambda^{-2} \partial_{2x} h = 0, \quad (39)$$

which is exactly the form of the beam equation in module 1, where $\lambda^{-2} = F/(EI)$ plays the role of an effective tension. We conclude that in the small gradient approximation and in one dimension, a uniform elastic fluid membrane behaves as an elastic beam under tension.

2.3.2 Flicker spectroscopy

A possible method to measure the elastic parameters of the membrane is provided by measuring the spectrum of thermal undulations via light microscopy. [1, 2]. This is known as *flicker spectroscopy*. It is typically performed on closed membranes but the analysis of a square membrane will still provide interesting information.

Consider a square membrane of size $L \times L$ with periodic boundary conditions. We expand the height of the membrane $h(\mathbf{r}) = h(x, y)$ as a double Fourier series:

$$h = \sum_{\mathbf{q}} h_{\mathbf{q}} e^{i\mathbf{q} \cdot \mathbf{r}} \quad , \quad \mathbf{q} = \frac{2\pi}{L} \begin{pmatrix} n_x \\ n_y \end{pmatrix} \quad , \quad n_x, n_y \in \mathbb{Z} . \quad (40)$$

Next, we compute the fluctuations of this membrane in thermal equilibrium.

■ Flicker Fluctuations

That is, we have

$$\langle |h_{\mathbf{q}}|^2 \rangle = \frac{2k_{\text{b}}T}{L^2(\kappa q^4 + \gamma q^2)} \quad (41)$$

The coefficients $\langle |h_{\mathbf{q}}|^2 \rangle$ (known as the *static structure factors*) can be measured from the spectrum. Fitting it to Eq. (41) yields the bending modulus and surface tension of the membrane (see Fig. 6).

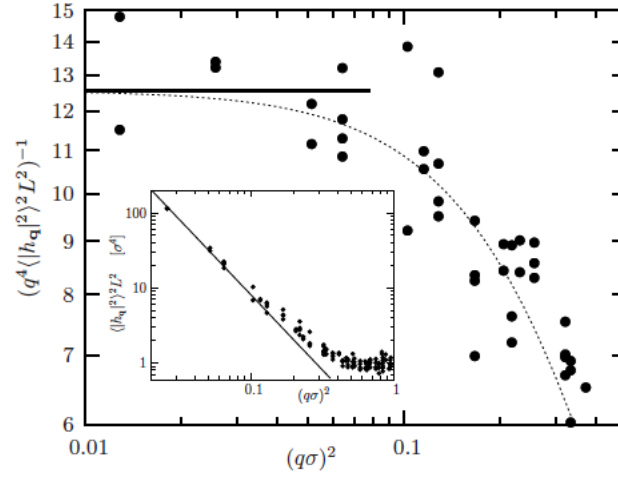


Figure 6: Flicker spectrum of a fluctuating membrane. The dashed line is a fit of the form $(k_B T / \kappa + c_1(q\gamma)c_2)^{-1}$ which helps to find the asymptotic value; the inset shows the unscaled spectrum. The fit leads to $\kappa = 12.5k_B T$, with an error estimated to be $\pm 1k_B T$. (Figure 1 from The Journal of Chemical Physics 125(20):204905 · December 2006, reproduced without permission).

3 Axisymmetric Membranes and Shells

■ Elastic membranes and shells

We consider the axisymmetric deformation of membranes and shells in linear and nonlinear elasticity. These have biological applications in modelling the deformation and mechanics of red blood cells in physiological flows and also modelling filamentous growth of biological structures in the context of fungi and hyphae for instance. We start with a simple elastic membrane before considering the general case. Most of these notes follow the derivations from [3, 4, 5, 6], which are motivated in the context of filamentous growth.

3.1 Elastic membranes with linear constitutive laws

We begin by considering an extensible axisymmetric elastic membrane filled with an incompressible viscous fluid under pressure *and that there is no normal shear stress*. This type of formulation has been used successfully to describe the shape of red blood cells and other biomembranes [7, 8] and we adapt it here to include the effects of pressure-induced stretch, growth and geometry-dependent elastic properties of the membrane. We assume that the shape of the membrane remains axisymmetric in the deformation. Here, to derive a full set of equations, we use a method based on rational mechanics, we proceed in three steps: kinematics, mechanics, and constitutive laws.

3.1.1 Kinematics

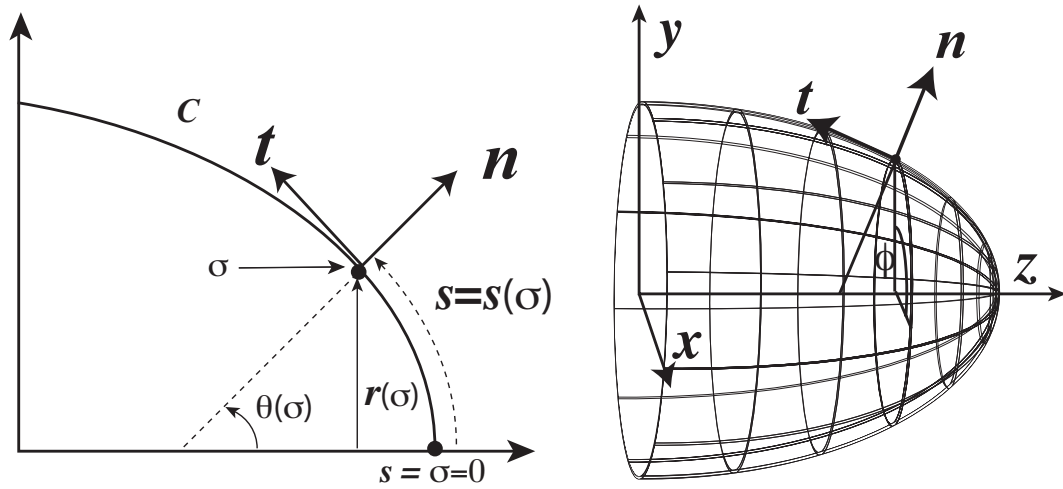


Figure 7: Basic membrane and shell geometry. A material point σ is measured by its arc-length, $s(\sigma)$ from the apex of the shell and its axial position $\mathbf{r}(\sigma)$ on a curve C , $\mathbf{n}$ and $\mathbf{t}$ denote the normal and tangent vectors at that point. The angle $\theta(s)$ is the angle between the normal direction and a fixed horizontal direction. The membrane is taken to be axisymmetric where φ is the azimuthal angle.

We assume that the shape of the membrane remains axisymmetric in the deformation. As shown in Figure 7, the membrane surface $\mathcal{S}$ is defined by revolving a planar curve $\mathcal{C}$ around

the z -axis. The reference planar curve $\mathcal{C}$ is parameterized by a parameter σ counted from the intersection $\mathcal{O}$ of the surface with the z -axis. The shell geometry is characterized by the distance from the axis $\mathbf{r} = \mathbf{r}(\sigma)$ and the angle $\theta = \theta(\sigma)$ between the normal to $\mathcal{C}$ at σ and the z -axis. The arclength at any time $s = s(\sigma)$ is measured from $\mathcal{O}$. Before deformation or growth, the material parameter σ is chosen to be the arc length, $s = \sigma$, and the initial shell configuration is referred to as the *reference configuration*. If we consider axisymmetric deformation of the surface, we can define the *radial stretch ratio*

$$\lambda_\varphi = \frac{r}{\rho}, \quad (42)$$

at a given (material) point as the ratio between the the new radius r and the original radius ρ at that point, and the *stretch ratio*

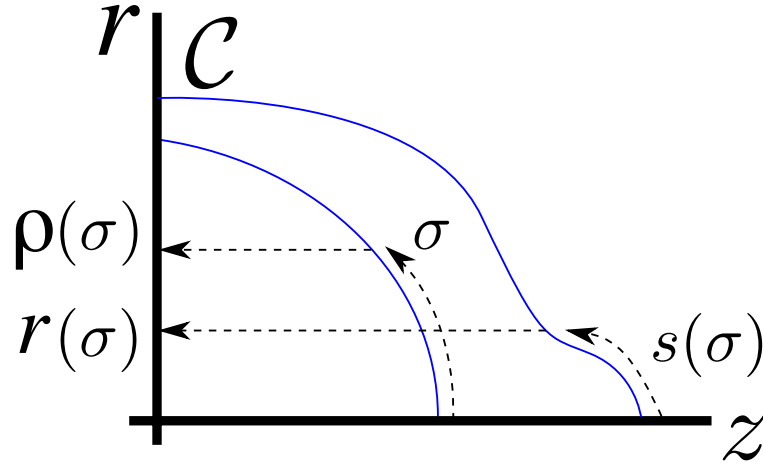


Figure 8: Definitions of stretches. We consider a reference curve before and after deformation.

$$\lambda_s = \frac{\partial s}{\partial \sigma}, \quad (43)$$

as the amount of stretching of the body coordinates with respect to arclength. These two *stretches* ($\lambda_\varphi, \lambda_s$) completely define the deformation of an axisymmetric reference shape. The geometric variables satisfy the equations

$$\frac{dr}{ds} = \cos(\theta), \quad \frac{dz}{ds} = -\sin(\theta), \quad (44)$$

Two other important measures of the geometry of the surface are the principal curvatures which are given by

$$\kappa_s = \frac{d\theta}{ds}, \quad \kappa_\varphi = \frac{\sin \theta}{r}. \quad (45)$$

Note 1: If we have an incompressible shell the third deformation variable, λ_3 , measuring changes in the normal thickness of the shell, is simply related to λ_s and λ_φ through the incompressibility condition $\lambda_s \lambda_\varphi \lambda_3 = 1$.

Note 2: A modelling choice must be made at this point. Is the membrane, the reduction to a surface of a 3D body (as one would expect say of a rubber balloon), or is the membrane a true

elastic surface (called “an elastic sheet”) with no transverse structure (as one would model a lipid bilayer)? This leads to a slightly different formulation of the problem. Haughton has a nice review paper on the subject [9].

3.1.2 Mechanics

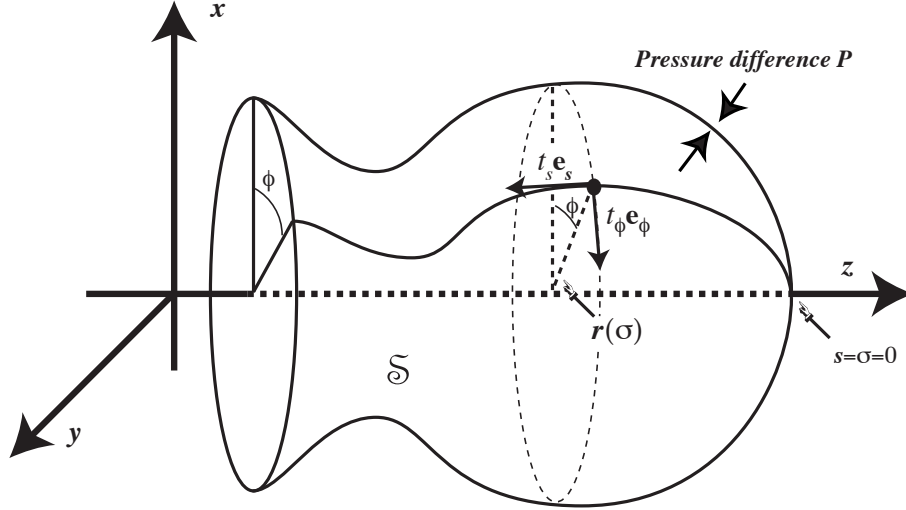


Figure 9: The surface $\mathcal{S}$ with stresses (t_s, t_φ) .

We now define the stresses acting on the membrane surface: let t_s be the tension on the surface along the tangent $\mathbf{e}_s$, in the direction of increasing arclength; and let t_φ be the tension along the unit vector $\mathbf{e}_\varphi$, normal to $\mathbf{e}_s$ in a plane tangent to $\mathcal{S}$, and in the direction of increasing azimuthal angle φ (see Figure 9).

The equations for mechanical equilibrium for a surface of revolution in the normal and tangential direction result from the balance of force and moments acting on a surface element.

■ Mechanical force balance

That is, we have,

$$P = \kappa_s t_s + \kappa_\varphi t_\varphi, \quad (46)$$

$$\frac{\partial(rt_s)}{\partial s} - t_\varphi \frac{\partial r}{\partial s} + rf = 0, \quad (47)$$

where P is the pressure difference across the membrane, and f is the shear stress on the membrane.

This last term could be taken to represent the drag forces exerted by the surrounding medium on the membrane. Appropriate modelling of this effect is nontrivial. For now, this term will be set to zero in our analysis.

Note: The two equations (46, 47) can be written in terms of r and θ by using the geometric relation $\mathbf{e}_s = \cos \theta \mathbf{e}_r + \sin \theta \mathbf{e}_z$, and $\partial \theta / \partial s = \kappa_s$, and take the form

$$t_s \frac{\partial \theta}{\partial s} + \frac{\sin \theta}{r} t_\varphi = P, \quad (48)$$

$$\frac{\partial t_s}{\partial s} = \frac{\cos \theta}{r} (t_\varphi - t_s). \quad (49)$$

In the case of constant pressure P we can verify that there is an integral of equations (48, 49), *i.e.* a function of the variables constant along the curve $\mathcal{C}$, given by:

$$C = r^2 (2t_s \kappa_\varphi - P). \quad (50)$$

In particular, for all solutions $(r(\sigma), \theta(\sigma))$ crossing the z -axis, we have $C = 0$ and $P = 2t_s\kappa_\varphi$.

3.1.3 Constitutive laws

From the general theory of elasticity for isotropic incompressible material, the tensions in the directions of the stretches are given by

$$t_i = \lambda_i \frac{\partial W}{\partial \lambda_i} - p, \quad i = s, \varphi, 3. \quad (51)$$

Here p is a Lagrange multiplier for incompressibility. A 3D membrane relationship is derived by using the membrane assumption, that states $t_3 = 0$, to eliminate p , whilst λ_3 is eliminated as incompressibility gives $\lambda_3\lambda_s\lambda_\varphi = 1$.

Regardless of the particular constitutive model, one can generally write the constitutive relationships in the form

$$t_s = Af_s(\lambda_s, \lambda_\varphi). \quad (52)$$

$$t_\varphi = Af_\varphi(\lambda_s, \lambda_\varphi), \quad (53)$$

Summary: To find the membrane shape, that is r , z , with constant pressure the complete system of membrane equations can be written as the closed system

$$\frac{ds}{d\sigma} = \lambda_s, \quad (54)$$

$$\frac{dz}{d\sigma} = -\lambda_s \sin(\theta), \quad (55)$$

$$\frac{dr}{d\sigma} = \lambda_s \cos(\theta), \quad (56)$$

$$\frac{d\theta}{d\sigma} = \frac{\lambda_s}{t_s} \left(P - t_\varphi \frac{\sin \theta}{r} \right), \quad (57)$$

$$\frac{dt_s}{d\sigma} = \lambda_s \frac{\cos \theta}{r} (t_\varphi - t_s) \quad (58)$$

$$t_s = f_s(\lambda_s, r/\rho) \quad (59)$$

$$t_\varphi = f_\varphi(\lambda_s, r/\rho) \quad (60)$$

along with initial profile $z = z_0(\sigma)$, $r = \rho(\sigma)$.

Note 1: computationally, we have a system of 5 differential equations and two algebraic equations for the variables $\{s, z, r, \theta, t_s, t_\varphi, \lambda_s\}$. It can usually be solved numerically for given boundary conditions without difficulty. Some care may be needed to find the correct boundary condition at $\sigma = 0$. This can sometimes be determined asymptotically for simple configurations (see Exercises).

Note 2: If volume rather than pressure is kept constant, then the pressure becomes a Lagrange multiplier that enforces the volume constraint. Starting from a guessed pressure, one can iterate the computation by computing the solution for each pressure under a volume constraint.

Note 3: In the case of a surface incompressibility (typical for bilayers), one needs to modify the strain energy density with the constraint, the associated new “surface pressure” will then need to be determined as part of the unknowns. This is a possible way to relate this theory to the fluid membranes section above.

3.1.3.1 Variable moduli. A deformation of the membrane can follow from either an increase in pressure or a softening of the walls. The softening can easily be taken into account by using a material-dependent elastic function $A = A(\sigma)$. A general form of $p = P/A$ can be taken as

$$p = \frac{P}{2} \left[1 - \tanh\left(\frac{\sigma - \sigma_1}{\alpha}\right) \right] + \beta, \quad (61)$$

where P is the internal pressure and the parameters σ_1 and α describe the length of the extension zone. Since $\lim_{\sigma \rightarrow \infty} p = \beta$, the parameter β describes the effective pressure in distal regions. Close to the deformation tip ($\sigma = 0$), the walls are soft and the elastic coefficient minimal. In the distal regions, the walls are set and the elastic coefficient A is, comparatively, very large, so that the effective pressure is small (equal to β). Note that a decreased modulus or increased pressure (or *vice versa*) are, at the mechanical level, indistinguishable, trivial mathematically, highly non-trivial biologically.

3.1.4 Inflation of a spherical membrane

It is of interest to consider the inflation of a spherical membrane.

■ The spherical membrane

We start with a shell of initial radius A_0 and deform it to a new shell of radius a and we define $\lambda = a/A_0$.

References

- [1] F. Brochard and J. F. Lennon. Frequency spektrum of flicker phenomenon in erythrocytes. *J. Phys.-Paris*, 36(11): pp. 1035–1047, 1975.
- [2] J. F. Faucon, M. D. Mitov, P. Meleard, I. Bivas, and P. Bothorel. Bending elasticity and thermal fluctuations of lipid-membranes– theoretical and experimental requirements. *J. Phys.-Paris*, 50(17): pp. 2389–2414, September 1989.
- [3] Alain Goriely and Michael Tabor. Estimates of biomechanical forces in Magnaporthe grisea. *MYCOLOGICAL RESEARCH*, 110(7):755–759, 2006.
- [4] Anthony Tongen, Alain Goriely, and Michael Tabor. Biomechanical model for appressorial design in Magnaporthe grisea. *JOURNAL OF THEORETICAL BIOLOGY*, 240(1):1–8, 2006.
- [5] A Goriely, G Karolyi, and M Tabor. Growth induced curve dynamics for filamentary micro-organisms. *JOURNAL OF MATHEMATICAL BIOLOGY*, 51(3):355–366, 2005.
- [6] A Goriely and M Tabor. Biomechanical models of hyphal growth in actinomycetes. *JOURNAL OF THEORETICAL BIOLOGY*, 222(2):211–218, 2003.
- [7] R SKALAK, A TOZEREN, RP ZARDA, and S CHIEN. STRAIN ENERGY FUNCTION OF RED BLOOD-CELL MEMBRANES. *BIOPHYSICAL JOURNAL*, 13(3):245–280, 1973.
- [8] TW SECOMB and JF GROSS. FLOW OF RED-BLOOD-CELLS IN NARROW CAPILLARIES - ROLE OF MEMBRANE TENSION. *INTERNATIONAL JOURNAL OF MICROCIRCULATION-CLINICAL AND EXPERIMENTAL*, 2(3):229–240, 1983.
- [9] Haughton DM. Elastic Membranes. *In NonLinear Elasticity, London Mathematical Society Lecture Note Series, Eds. Fu YB and Ogden RW*, pages 233–67, ISBN-13: 9780511893698, 2001.